PROJECT NAME	JOB NO.	ITEM NO

Cafeteria self-service air-screen case drop-in installation detail

MODEL **M/SWIND**

Section view Not to scale

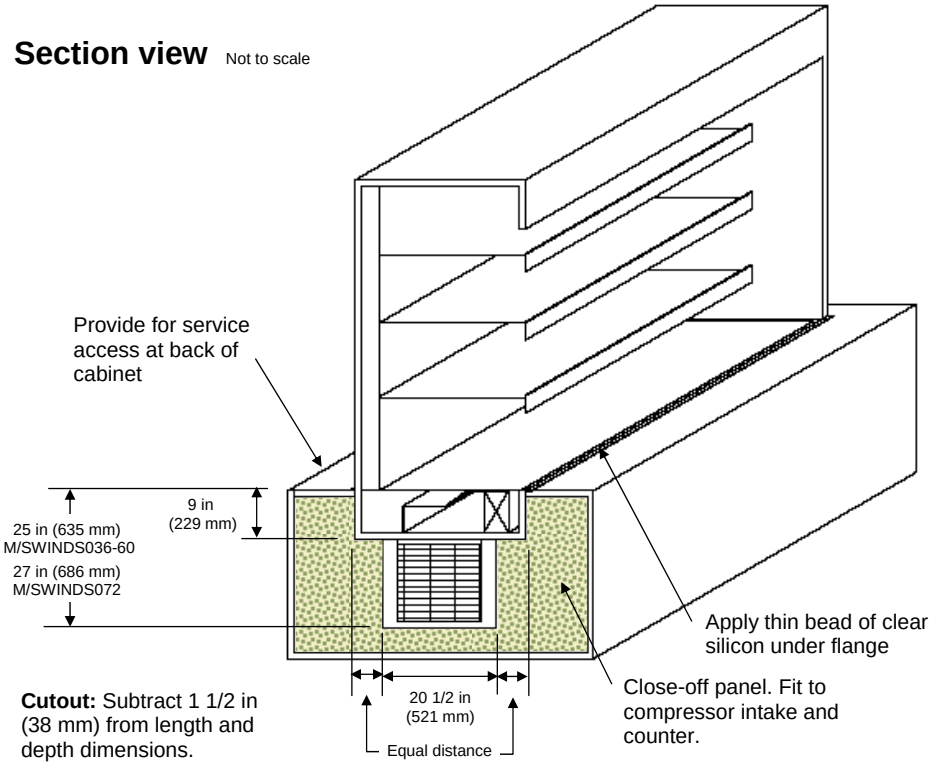

Cutout: Subtract 1 1/2 in (38 mm) from length and depth dimensions.

Drop-in installation notes

1. Refcon Drop-ins should be installed by mechanics familiar with the installation of refrigeration equipment.
2. Refcon Service and Installation Manual as well as this Installation Detail sheet should be followed during installation.
3. If standard air flow pattern shown below cannot be followed, Refcon must be advised about that to suggest an alternative.
4. Intake and exhaust louvers must have a minimum of 4 in. (102 mm) unobstructed outside space for air cooling to function properly.
5. It is recommended that access to the condensing unit be provided as indicated on the Plan View below for easy maintenance and technical service.
6. Refcon offers free telephone installation support for installation of any Refcon equipment. Call to schedule the installation support session.

Plan view Not to scale

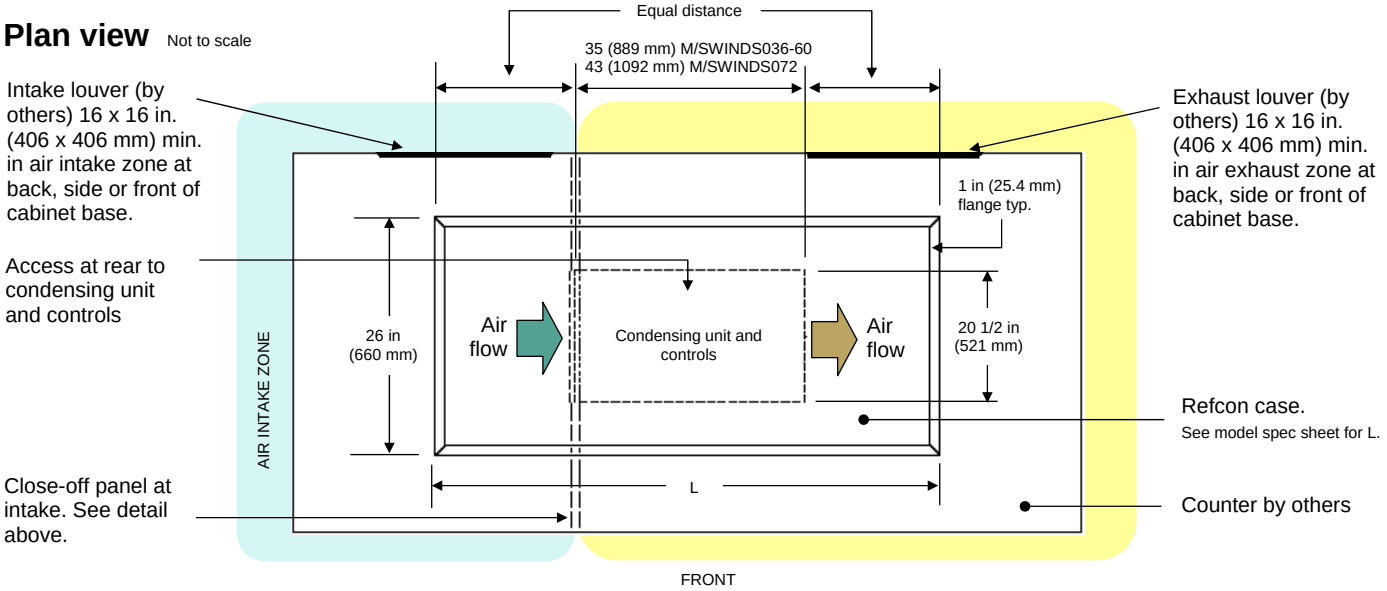

Designed to operate in air conditioned space maintained at 75°F (24°C) and 55% relative humidity. Continuing product improvement may subject specifications to change without notice.

CUSTOMER NAME	
☐ APPROVED ☐ APPROVED AS NOTED ☐ RESUBMIT	
AUTHORIZED SIGNATURE	DATE

Refcon Inc.
335 Chestnut Street Norwood, NJ 07648 USA
Tel: (201) 750-5060
Fax: (201) 750-5066
e-mail: sales@refconcase.com
www.refconcase.com

© 2010 Refcon Inc., Norwood, NJ 07648 USA Revised 01-01-10