

PROJECT NAME	JOB NO.	QUANTITY	ITEM NO
--------------	---------	----------	---------

Air screen Milkindizer™ refrigerated case

MODEL SWINM-LG

Low girl cooler



Milkindizer™ airscreen refrigerated case low girl Model SWINM-LG with custom graphic treatment.

General Information

Low girl refrigerated cases provide the ideal display solution for self-serve milk in schools.

A curtain of refrigerated air directed across the open top efficiently seals off warmer ambient air. This allows better visibility, easy selection and loading, and eliminates maintenance problems with worn-out or ill-fitting doors.

The Milkindizer air screen low girl model is designed especially by

Refcon to promote individual serving containers of milk in school cafeterias. Standard milk crates holding bottles or paper cartons drop onto the angled stainless steel deck for easy access and loading.

The side flat area is used to house the compressor and controls. The top can be used for added dry product display.

Refcon Air Screen cases are attractive, quiet, and built from tough, easy-to-clean stainless steel and laminates. Electronic temperature and defrost control and digital temperature display makes it easy to keep products cold while using energy efficiently.

Available with self-contained or remote refrigeration. Leveling legs are standard. Choose from 3 lengths for 8, 10, or 12 whole-crate capacity.

Standard Features

- Stainless steel interior.
- Standard grade plastic laminate exterior (matte finish.)
- Digital temperature display.
- Electronic temperature and defrost control (self-contained units).
- Structural steel base with leveling legs.
- Refrigeration and electrical connections in end compartment.

Options

- Stainless steel exterior
- Remote refrigeration temperature control package
- Graphics
- HTH (High temperature/humidity) package—80°F (27°C)/60% R.H. for adverse environments. Contact Refcon for specifications adjustments
- Locking casters
- Power cord and plug

Designed to operate in air conditioned space maintained at 75°F (24°C) and 55% relative humidity. Continuing product improvement may subject specifications to change without notice.

CUSTOMER NAME	
<input type="checkbox"/> APPROVED	<input type="checkbox"/> APPROVED AS NOTED
<input type="checkbox"/> RESUBMIT	
AUTHORIZED SIGNATURE	DATE



Refcon Inc.
 335 Chestnut Street Norwood, NJ 07648 USA
 Tel: (201) 750-5060
 Fax: (201) 750-5066
 e-mail: sales@refconcase.com
REFCON™ www.refconcase.com


PROJECT

ITEM NO

Air screen Milkindizer™ refrigerated case

Low girl cooler

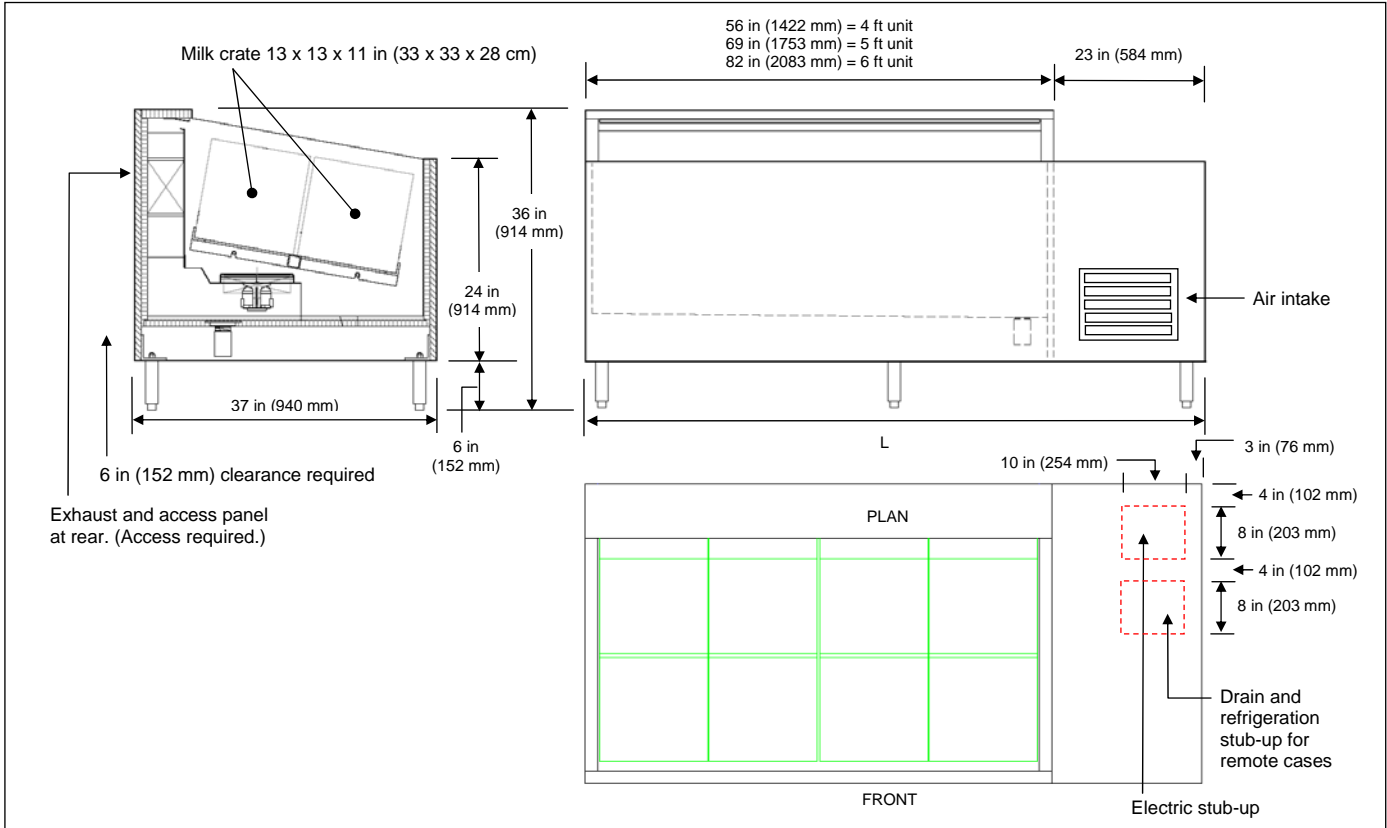

MODEL SWINM-LG



	Model	Dimensions		Whole crates	Required Refrigeration	Crated Weight	
		(L x D x H) in	(L x D x H) mm			lb	kg
Self-contained Refrigeration	SWINMS056-LG	79 x 37 x 36	2007 x 940 x 914	8	1 HP	700	318
	SWINMS069-LG	92 x 37 x 36	2337 x 940 x 914	10	1 1/4 HP	800	363
	SWINMS082-LG	105 x 37 x 36	2667 x 940 x 914	12	1 1/2 HP	900	409
Remote Refrigeration (R404a)	SWINMR056-LG	79 x 37 x 36	2007 x 940 x 914	8	6400 @ +15	500	227
	SWINMR069-LG	92 x 37 x 36	2337 x 940 x 914	10	7600 @ +15	600	272
	SWINMR082-LG	105 x 37 x 36	2667 x 940 x 914	12	8850 @ +15	700	318

Laboratory certifications



Electrical	Model	Volts	Phase	Cycle/Hz	Watts	MCA	Plug type (optional)
Self-contained Refrigeration	SWINMS056-LG	120-208	1	60	1659	14	NEMA L14-20P 
	SWINMS069-LG	120-208	1	60	1522	13	
	SWINMS082-LG	120-208	1	60	1876	16	
Remote Refrigeration (R404a)	SWINMR056-LG	120	1	60	263	3	NEMA 5-15P 
	SWINMR069-LG	120	1	60	263	3	
	SWINMR082-LG	120	1	60	263	3	

NOTE: Floor drain required. 6 in (152 mm) clearance required at back of unit.

Please specify exterior finish:



Refcon Inc.

Tel: (201) 750-5060
www.refconcase.com