

PROJECT NAME	JOB NO.	QUANTITY	ITEM NO
--------------	---------	----------	---------

Cafeteria self-service refrigerated case

MODEL M/SMASDS



Cafeteria self-service refrigerated case, Model M/SMASDS

General Information

The M/SMASDS self-service refrigerated case features a stainless steel deck and two glass shelves with individual lift-up Lexan® doors for front access to all three display levels. Fluorescent lighting, Lexan® sliding rear doors and Lexan® end panels are standard.

Refcon M/SMASDS models are available in three standard lengths and are often specified as “drop-in” items, ready to install directly into your counters.

We can also integrate the self-serve refrigerated case into a complete, custom cafeteria counter line with a variety of dry, heated, refrigerated and self-service cases according to designers specifications.

In addition, we offer several contemporary design concepts, such as “floating counters” that use pedestal bases to create an open look. Everything you want and need, from the basics to the exotic, from one trusted source.

Standard Features

- Curved Lexan® top with Lexan® lift-up doors for customer access.
- Stainless steel deck.
- Two glass shelves.
- Lexan® ends.
- Lexan® rear sliding doors.
- 3500K fluorescent lights.
- Condensate evaporator (self-contained units).
- Digital temperature display.
- Electronic temperature and defrost control (self-contained units.)
- 6 ft. power cord and plug.

Options

- Custom base counter
- Remote refrigeration (R404a)
 - Remote refrigeration temperature control package
- 1-year labor warranty
- 5-year compressor warranty

Designed to operate in air conditioned space maintained at 75°F (24°C) and 55% relative humidity. Continuing product improvement may subject specifications to change without notice.

CUSTOMER NAME	
<input type="checkbox"/> APPROVED	<input type="checkbox"/> APPROVED AS NOTED
<input type="checkbox"/> RESUBMIT	
AUTHORIZED SIGNATURE	DATE




Refcon Inc.
335 Chestnut Street Norwood, NJ 07648 USA
Tel: (201) 750-5060
Fax: (201) 750-5066
e-mail: sales@refconcase.com
REFCON™ www.refconcase.com

PROJECT	ITEM NO
---------	---------

Cafeteria self-service refrigerated case

MODEL M/SMASDS

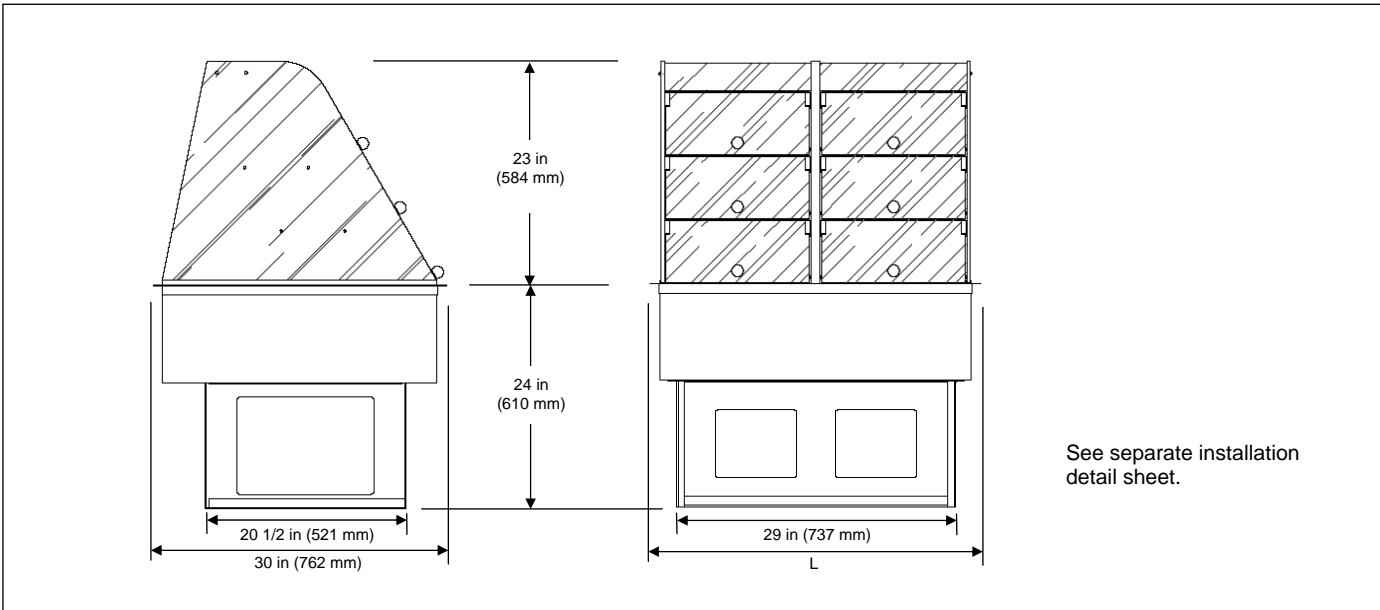

Model	Dimensions		Lift-up Doors Sections/Doors	Refrigeration requirements	Crated Weight	
	(L x D x H) in	(L x D x H) mm			lb	kg
M/SMASDS032	34 1/2 x 30 x 23	1022 x 762 x 584	2/6	1/4 HP	350	159
M/SMASDS048	50 3/4 x 30 x 23	1324 x 762 x 584	3/9	1/4 HP	450	204
M/SMASDS065	67 x 30 x 23	1524 x 762 x 584	4/12	1/3 HP	500	227

Laboratory
certifications




Clearances: 23 in. (584 mm) below deck required.

See separate installation detail sheet.

Cutout: Subtract 1 1/2 in. (38 mm) from length and depth dimensions.

Electrical

Model	Volts	Phase	Cycle/Hz	Watts	MCA	Plug type
M/SMASDS032	120	1	60	1461	13	NEMA 5-15P 
M/SMASDS048	120	1	60	1497	13	
M/SMASDS065	120	1	60	155	13	

NOTE: Floor drain required for remote units.

Please specify exterior finish:



Refcon Inc.

Tel: (201) 750-5060
www.refconcase.com