

PROJECT NAME	JOB NO.	QUANTITY	ITEM NO
--------------	---------	----------	---------

# Cafeteria refrigerated angled salad bar MODEL MA/SPRED



Cafeteria refrigerated angled salad bar Model MA/SPRED shown with optional stainless steel lighted sneeze guard.

### General Information

The Refcon cafeteria refrigerated salad bar offers contemporary design in a well-built, highly functional case.

The food well is angled forward slightly for better product presentation and easier customer access. All units use the air over/under refrigeration concept to assure ideal product temperatures throughout. Stainless steel interior,

spanner bars and exterior are standard.

Refcon cafeteria salad bars are available in six standard lengths and are often specified as "drop-in" items, ready to install directly into your counters.

We can also integrate the refrigerated salad bar into a complete, custom cafeteria counter line with a variety of dry, heated, refrigerated and self-service cases according to designers specifications.

In addition, we offer several contemporary design concepts, such as "floating counters" that use pedestal bases to create an open look. Everything you want and need, from the basics to the exotic, from one trusted source.

### Standard Features

- Angled well design.
- Stainless interior and exterior.
- Stainless steel spanner bars fit for standard 12 x 20 x 4 in. (305 x 508 x 102 mm) pans.
- Digital temperature display.
- Electronic temperature and defrost control (self-contained units.)
- ON/OFF power switch (self-contained units.)
- 6 ft. power cord and plug.

NOTE: Floor drain required.

### Options

- Stainless steel and tempered glass sneeze guard with light
- Custom base counter
- Remote refrigeration temperature control package
- 1-year labor warranty
- 5-year compressor warranty

Designed to operate in air conditioned space maintained at 75°F (24°C) and 55% relative humidity. Continuing product improvement may subject specifications to change without notice.

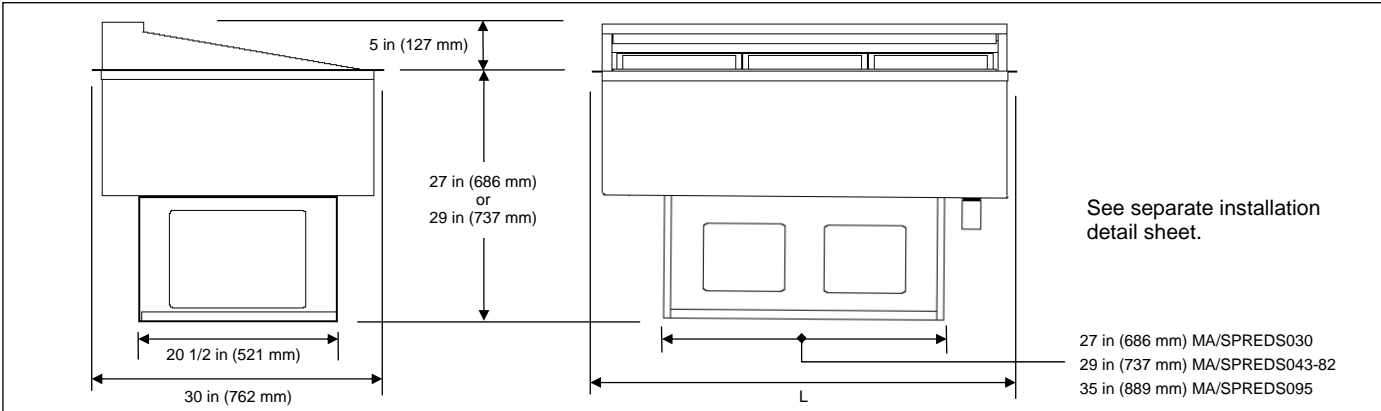
CUSTOMER NAME	
<input type="checkbox"/> APPROVED	<input type="checkbox"/> APPROVED AS NOTED
<input type="checkbox"/> RESUBMIT	
AUTHORIZED SIGNATURE	DATE



**Refcon Inc.**  
 335 Chestnut Street Norwood, NJ 07648 USA  
 Tel: (201) 750-5060  
 Fax: (201) 750-5066  
 e-mail: sales@refconcase.com  
**www.refconcase.com**




PROJECT	ITEM NO
---------	---------

# Cafeteria refrigerated angled salad bar MODEL MA/SPRED



	Model	Dimensions (drop-in version)		Refrigeration requirements	Pans 12 x 20 x 4	Crated Weight	
		(L x D x H) in	(L x D x H) mm			lb	kg
Self-contained Refrigeration	MA/SPREDS030	30 7/8 x 30 x 27	784 x 762 x 686	1/4 HP	2	275	125
	MA/SPREDS043	43 7/8 x 30 x 27	1114 x 762 x 686	1/3 HP	3	300	136
	MA/SPREDS056	56 7/8 x 30 x 27	1445 x 762 x 686	1/2 HP	4	350	159
	MA/SPREDS069	69 3/4 x 30 x 27	1772 x 762 x 686	1/2 HP	5	400	182
	MA/SPREDS082	82 9/16 x 30 x 27	2097 x 762 x 686	1/2 HP	6	500	227
	MA/SPREDS095	95 1/2 x 30 x 29	2426 x 762 x 737	3/4 HP	7	600	272
Remote Refrigeration (R404a)	MA/SPREDR030	30 7/8 x 30 x 27	784 x 762 x 686	1600 @ +15	2	225	102
	MA/SPREDR043	43 7/8 x 30 x 27	1114 x 762 x 686	2400 @ +15	3	275	125
	MA/SPREDR056	56 7/8 x 30 x 27	1445 x 762 x 686	3000 @ +15	4	325	148
	MA/SPREDR069	69 3/4 x 30 x 27	1772 x 762 x 686	3800 @ +15	5	375	170
	MA/SPREDR082	82 9/16 x 30 x 27	2097 x 762 x 686	4500 @ +15	6	425	193
	MA/SPREDR095	95 1/2 x 30 x 27	2426 x 762 x 686	5200 @ +15	7	475	216

## Electrical

	Model	Volts	Phase	Cycle/Hz	Watts	MCA	Plug type
Self-contained Refrigeration	MA/SPREDS030	120	1	60	1297	11	NEMA 5-15P 
	MA/SPREDS043	120	1	60	1034	9	
	MA/SPREDS056	120	1	60	1502	13	
	MA/SPREDS069	120	1	60	1502	13	
	MA/SPREDS082	120	1	60	1756	15	
	MA/SPREDS095	120-208	1	60	1426	10	NEMA L14-20P 
Remote Refrigeration (R404a)	MA/SPREDR030	120	1	60	13	1	NEMA 5-15P 
	MA/SPREDR043	120	1	60	26	1	
	MA/SPREDR056	120	1	60	26	1	
	MA/SPREDR069	120	1	60	26	1	
	MA/SPREDR082	120	1	60	40	1	
	MA/SPREDR095	120	1	60	53	1	

## Laboratory certifications



**Cutout:**  
Subtract 1 1/2 in. (38 mm) from length and depth dimensions.

See separate installation detail sheet.

NOTE: Floor drain required.

Please specify exterior finish:



Refcon Inc.

Tel: (201) 750-5060  
www.refconcase.com