

PROJECT NAME	JOB NO.	QUANTITY	ITEM NO
--------------	---------	----------	---------

# Deli low profile corner cases

MODEL **IC/OC**



Low profile deli case incorporating 45° outside corner Model IC-LLLG-45

## General Information

Explore the deli design possibilities using Refcon low profile corner cases! Refcon offers both inside and outside 45-degree and 90-degree corners for service and self-service low profile cases.

Refrigeration is remote and comes from the adjacent straight case.

Refcon low profile deli cases are designed for maximum product presentation value and built from tough, easy-to-clean laminates and stainless steel.

Refcon corner cases offer the same features as straight cases so you can be assured your case line-up will match in every way.

## Standard Features

- Tempered curved glass.
- Stainless steel deck and rear plenum.
- Exterior standard grade plastic laminate (matte finish).
- 3500K fluorescent lights.
- Digital temperature display.

## Options

- Lexan® end
- One-way mirror end
- Solid mirror end
- Tiered display insert
  - 1 step for 2-level display
  - 2 steps for 3-level display
- Scale platform
- Front cart bumper
- Rear flip-up cutting board
- Lower front decorative lighting
- LED lighting
- Continuous case line up
- GFI convenience outlet 15A (to J box)
- Power cord and plug
- 1-year labor warranty

Designed to operate in air conditioned space maintained at 75°F (24°C) and 55% relative humidity. Continuing product improvement may subject specifications to change without notice.

CUSTOMER NAME	
<input type="checkbox"/> APPROVED	<input type="checkbox"/> APPROVED AS NOTED
<input type="checkbox"/> RESUBMIT	
AUTHORIZED SIGNATURE	DATE




**Refcon Inc.**  
 335 Chestnut Street Norwood, NJ 07648 USA  
 Tel: (201) 750-5060  
 Fax: (201) 750-5066  
 e-mail: sales@refconcase.com  
**www.refconcase.com**

PROJECT

ITEM NO

# Deli low profile corner cases

MODEL IC/OC

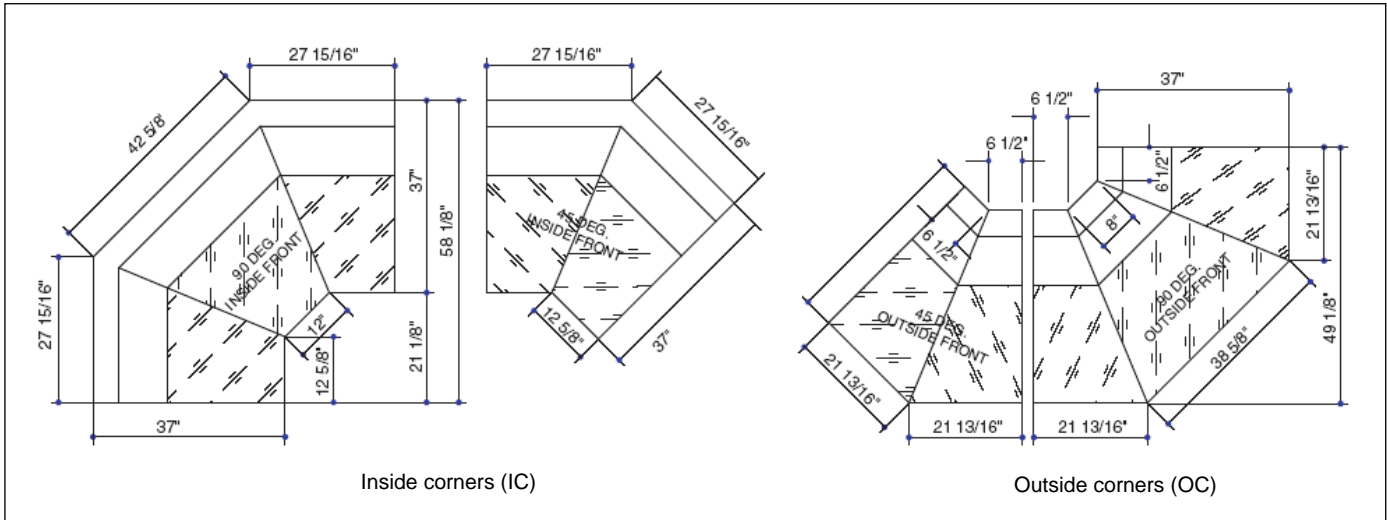


Model	Application	Refrigeration requirements	Crated Weight	
			lb	kg
IC-LLLG-45	Inside corner 45° angle, full-service	1400 @ +15	960	436
IC-LLLG-90	Inside corner 90° angle, full-service	2700 @ +15	1080	490
OC-LLLG-45	Outside corner 45° angle, full-service	1400 @ +15	960	436
OC-LLLG-90	Outside corner 90° angle, full-service	2700 @ +15	1080	490
IC-SLLG-45	Inside corner 45° angle, self-service	2000 @ +15	820	372
IC-SLLG-90	Inside corner 90° angle, self-service	3600 @ +15	970	440
OC-SLLG-45	Outside corner 45° angle, self-service	2000 @ +15	820	372
OC-SLLG-90	Outside corner 90° angle, self-service	3600 @ +15	970	440

## Laboratory certifications



## Electrical

Model	Volts	Phase	Cycle/Hz	Watts	Amps	Plug type (optional)
IC-LLLG-45	120	1	60	207	3	NEMA 5-15P 
IC-LLLG-90	120	1	60	207	3	
OC-LLLG-45	120	1	60	207	3	
OC-LLLG-90	120	1	60	207	3	
IC-SLLG-45	120	1	60	207	3	
IC-SLLG-90	120	1	60	207	3	
OC-SLLG-45	120	1	60	207	3	
OC-SLLG-90	120	1	60	207	3	

NOTE: Floor drain required for remote units.

Please specify exterior finish:



Refcon Inc.

Tel: (201) 750-5060  
www.refconcase.com