

PROJECT NAME	JOB NO.	QUANTITY	ITEM NO
-----------------	---------	----------	---------

Deli multi-deck self-service case

Six-level

MODEL **SPRED-6**



Deli multi-deck self-service case Model SPRED-6

General Information

Refcon multi-deck self-service deli cases let you pack a whole lot of product for grab-and-go convenience practically anywhere in the store... and look good doing it.

These attractive cases also give you flexibility. Different case lengths as well as four different case heights let you choose the capacity *and* the footprint you want.

The Refcon SPRED-6 gives you the most capacity for the footprint, with five lighted shelves and a lighted bottom deck for a total of six display surfaces. All multi-deck cases are designed for maximum product presentation value and built from tough, easy-to-clean laminates and stainless steel.

Several options are available that can give your Refcon multi-deck cases a distinctive look. Cases can also be designed for a continuous case line up.

Standard Features

- Stainless steel interior deck and rear plenum.
- Mirror ends.
- Five lighted stainless steel shelves with adjustable angle brackets.
- Exterior standard grade plastic laminate (matte finish).
- 3500K fluorescent lights.
- Digital temperature display.
- Condensate evaporator (self-contained units).
- Electronic temperature and defrost control (self-contained units).

Options

- Glass ends
- 4 in. exhaust wall standoffs
- Black powder-painted interior
- Continuous case line up
- One-way mirror rear load door
- Pull-down plastic energy shade
- Remote refrigeration temperature control package
- High Temp/Humidity refrigeration package: 80°F (27°C) 60% RH (contact Refcon for mechanical specifications)
- LED lighting
- Sound reduction package
- Power cord and plug
- 1-year labor warranty
- 5-year compressor warranty
- Choice of alternative air flow patterns—see air screen airflow options sheet for details.

Designed to operate in air conditioned space maintained at 75°F (24°C) and 55% relative humidity. Continuing product improvement may subject specifications to change without notice.

CUSTOMER NAME	
<input type="checkbox"/> APPROVED	<input type="checkbox"/> APPROVED AS NOTED
<input type="checkbox"/> RESUBMIT	
AUTHORIZED SIGNATURE	DATE




Refcon Inc.
 335 Chestnut Street Norwood, NJ 07648 USA
 Tel: (201) 750-5060
 Fax: (201) 750-5066
 e-mail: sales@refconcase.com
www.refconcase.com

Deli multi-deck self-service case

Six-level

MODEL **SPRED-6**

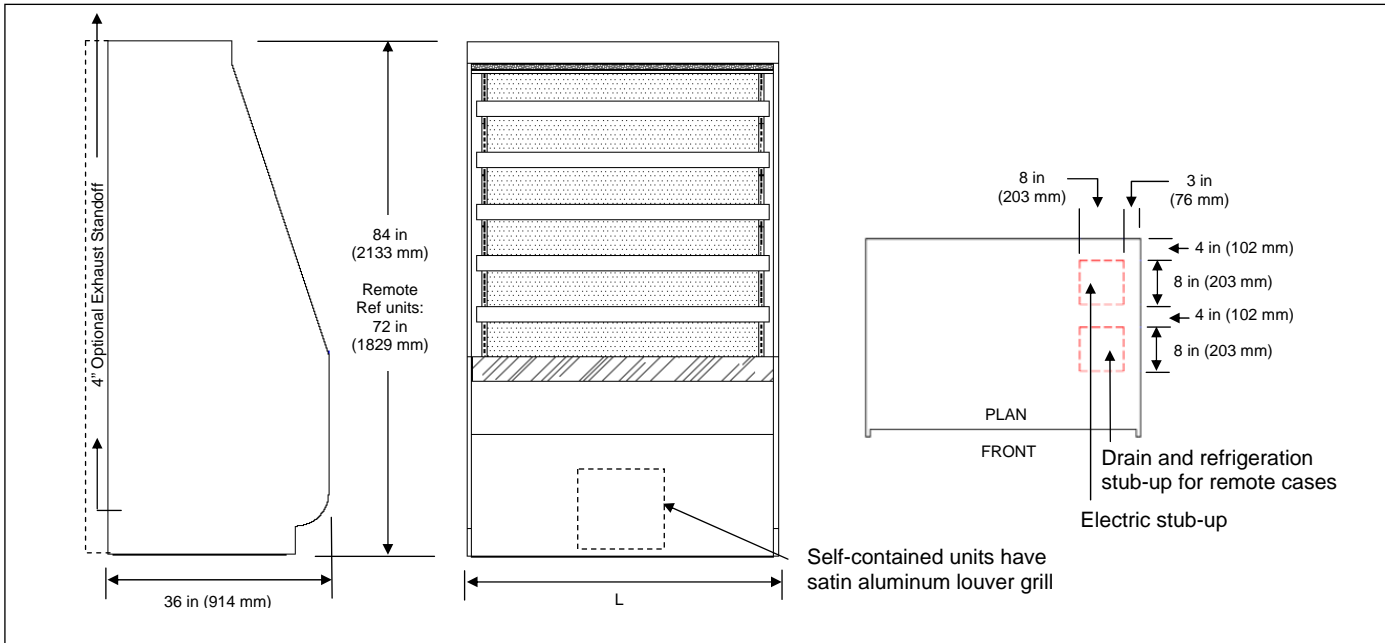

Self-contained Refrigeration	Model	Dimensions		Refrigeration requirements	Crated Weight	
		(L x D x H) in	(L x D x H) mm		lb	kg
	SPREDS048-6	49 1/2 x 36 x 84	1257 x 914 x 2133	1 HP	950	431
	SPREDS072-6	73 1/2 x 36 x 84	1867 x 914 x 2133	1 1/2 HP	1125	511
Remote Refrigeration (R404a)	SPREDR048-6	49 1/2 x 36 x 72	1257 x 914 x 1829	7000 @ +15	850	386
	SPREDR072-6	73 1/2 x 36 x 72	1867 x 914 x 1829	10500 @ +15	1025	465
	SPREDR096-6	97 1/2 x 36 x 72	2477 x 914 x 1829	14000 @ +15	1200	545
	SPREDR144-6	145 1/2 x 36 x 72	3696 x 914 x 1829	21000 @ +15	1800	817

Laboratory certifications



Electrical

Self-contained Refrigeration	Model	Volts	Phase	Cycle/Hz	Watts	MCA	Plug type (optional)
Self-contained Refrigeration	SPREDS048-6	120-208	1	60	3395	23	NEMA L14-30P
	SPREDS072-6	120-208	1	60	4649	29	
Remote Refrigeration (R404a)	SPREDR048-6	120	1	60	445	5	NEMA 5-15P
	SPREDR072-6	120	1	60	575	6	
	SPREDR096-6	120	1	60	890	9	
	SPREDR144-6	120	1	60	1150	12	

NOTE: 1) Floor drain required for remote units. 2) See air screen airflow options sheet.

Please specify exterior finish:



Refcon Inc.

Tel: (201) 750-5060
www.refconcase.com