

PROJECT NAME	JOB NO.	QUANTITY	ITEM NO
--------------	---------	----------	---------


# Air screen airflow options

MODEL **SWIND**  
**SWIND-HTH**  
**SWINA**  
**SWINB**  
**SLEGB**  
**SPRED**


## General Information

The following illustrations show standard airflow and three available optional airflow patterns for Air Screen Cases SWIND, SWIND-HTH, SWINA, SWINB, SLEGB and SPRED.


Please mark choice in box next to Standard airflow or option A, B, or C.



Standard airflow  
 4 in (10 cm) minimum clearance back.



Option A-1       Option A-2  
 12 in (30 cm) minimum clearance sides.

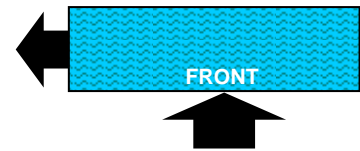

Option B-1       Option B-2  
 12 in (30 cm) minimum clearance sides.



Option C  
 36 in (91 cm) minimum clearance back.

Designed to operate in air conditioned space maintained at 75°F (24°C) and 55% relative humidity. Continuing product improvement may subject specifications to change without notice.

CUSTOMER NAME	
<input type="checkbox"/> APPROVED <input type="checkbox"/> APPROVED AS NOTED <input type="checkbox"/> RESUBMIT	
AUTHORIZED SIGNATURE	DATE



**Refcon Inc.**  
 335 Chestnut Street Norwood, NJ 07648 USA  
 Tel: (201) 750-5060  
 Fax: (201) 750-5066  
 e-mail: sales@refconcase.com  
**REFCON™**      [www.refconcase.com](http://www.refconcase.com)