

PROJECT NAME	JOB NO.	QUANTITY	ITEM NO
--------------	---------	----------	---------

Air screen upright refrigerated case

24" Deep case

MODEL **SWIND-24**



General Information

Air screen upright refrigerated cases provide the ideal display solution for self-serve beverages and chilled prepackaged items without customer-side doors.

A curtain of refrigerated air directed across the open front efficiently seals off warmer ambient air. This allows better visibility, easy selection and loading, and eliminates maintenance problems with worn-out or ill-fitting doors.

Refcon Air Screen cases are attractive, quiet, and built from tough, easy-to-clean stainless steel and laminates. Standard 3500K interior lighting offers a bright, attention-getting display. Electronic temperature and defrost control and

digital temperature display makes it easy to keep products cold while using energy efficiently.

Available with self-contained or remote refrigeration. Leveling legs are standard. Choose from 4 lengths up to 6 ft (1.8m).

Upright airscreen case Model SWINDR048-24 with optional additional shelf.

Standard Features

- Stainless steel interior.
- Mirror ends.
- (3) adjustable lighted 12 in. (30 cm) shelves.
- Top mounted compressor for self-contained units.
- Standard grade plastic laminate exterior (matte finish).
- 3500K fluorescent tube lights.
- Condensate evaporator (self-contained units).
- Digital temperature display.
- Electronic temperature and defrost control (self-contained units).
- Structural steel base with leveling legs.

Options

- Stainless steel exterior
- Black powder painted interior
- White powder painted interior
- Custom powder painted interior
- Remote refrigeration temperature control package
- Additional shelves with lights
- LED lighting
- Pull down plastic energy shade
- Power cord and plug
- 1-year labor warranty
- 5-year compressor warranty

Security Options

- Removable Lexan® security panels

Designed to operate in air conditioned space maintained at 75°F (24°C) and 55% relative humidity. Continuing product improvement may subject specifications to change without notice.

CUSTOMER NAME	
<input type="checkbox"/> APPROVED	<input type="checkbox"/> APPROVED AS NOTED
<input type="checkbox"/> RESUBMIT	
AUTHORIZED SIGNATURE	DATE




Refcon Inc.
 335 Chestnut Street Norwood, NJ 07648 USA
 Tel: (201) 750-5060
 Fax: (201) 750-5066
 e-mail: sales@refconcase.com
www.refconcase.com

PROJECT

ITEM NO

Air screen upright refrigerated case

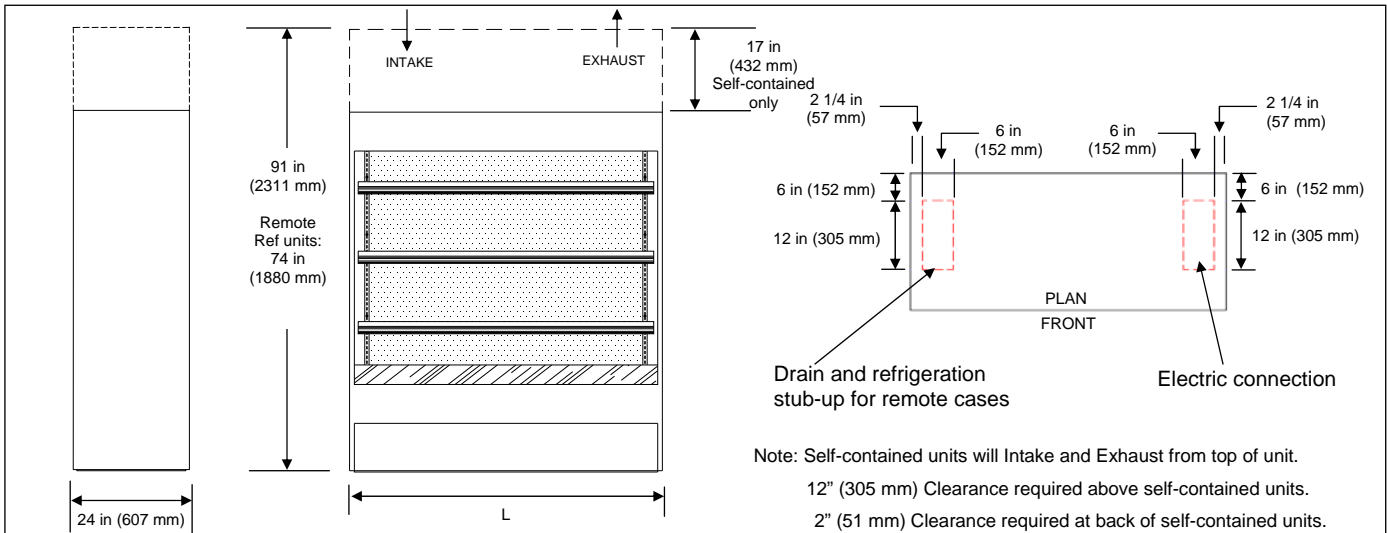


24" Deep case

MODEL **SWIND-24**

	Model	Dimensions		Required Refrigeration	Crated Weight	
		(L x D x H) in	(L x D x H) mm		lb	kg
Self-contained Refrigeration	SWINDS036-24	37 1/2 x 24 x 91	953 x 610 x 2311	3/4 HP	474	215
	SWINDS048-24	49 1/2 x 24 x 91	1257 x 610 x 2311	3/4 HP	569	258
	SWINDS060-24	61 1/2 x 24 x 91	1562 x 610 x 2311	1 1/4 HP	711	323
	SWINDS072-24	73 1/2 x 24 x 91	1867 x 610 x 2311	1 1/2 HP	853	387
Remote Refrigeration (R404a)	SWINDR036-24	37 1/2 x 24 x 74	953 x 610 x 1880	4800 @ +15	374	170
	SWINDR048-24	49 1/2 x 24 x 74	1257 x 610 x 1880	6400 @ +15	468	212
	SWINDR060-24	61 1/2 x 24 x 74	1562 x 610 x 1880	8000 @ +15	655	297
	SWINDR072-24	73 1/2 x 24 x 74	1867 x 610 x 1880	9600 @ +15	749	340

Laboratory certifications



Electrical	Model	Volts	Phase	Cycle/Hz	Watts	MCA	Plug type (optional)
Self-contained Refrigeration	SWINDS036-24	120-208	1	60	2623	17	NEMA L14-20P 
	SWINDS048-24	120-208	1	60	3264	22	NEMA L14-30P 
	SWINDS060-24	120-208	1	60	3635	24	
	SWINDS072-24	120-208	1	60	4079	27	
Remote Refrigeration (R404a)	SWINDR036-24	120	1	60	250	3	NEMA 5-15P 
	SWINDR048-24	120	1	60	282	3	
	SWINDR060-24	120	1	60	310	4	
	SWINDR072-24	120	1	60	505	5	

NOTE: Floor drain required for remote units.

Please specify exterior finish:



Refcon Inc.

Tel: (201) 750-5060
www.refconcase.com