

PROJECT NAME	JOB NO.	QUANTITY	ITEM NO
--------------	---------	----------	---------

Cafeteria refrigerated salad bar

MODEL M/SPRED



Cafeteria refrigerated salad bar Model M/SPRED shown with optional stainless steel sneeze guard and light.

General Information

The Refcon cafeteria refrigerated salad bar offers contemporary design in a well-built, highly functional case.

All units use the air over/under refrigeration concept to assure ideal product temperatures throughout. Stainless steel interior and exterior are standard.

Refcon M/SPRED models are available in six standard lengths and are often specified as "drop-in" items, ready to install directly into your counters.

We can also integrate the refrigerated salad bar into a complete, custom cafeteria counter line with a variety of dry, heated, refrigerated and self-service cases according to designers specifications.

In addition, we offer several contemporary design concepts, such as "floating counters" that use pedestal bases to create an open look. Everything you want and need, from the basics to the exotic, from one trusted source.

Standard Features

- Stainless steel interior and exterior.
- Stainless steel spanner bars fit for standard 12 x 20 x 4 in. (305 x 508 x 102 mm) pans.
- Digital temperature display.
- Electronic temperature and defrost control (self-contained units.)
- ON/OFF power switch (self-contained units.)
- 6 ft. power cord and plug.

NOTE: Floor drain required.

Options

- Stainless steel and tempered glass sneeze guard with light
- Custom base counter
- Remote refrigeration temperature control package
- 1-year labor warranty
- 5-year compressor warranty

Designed to operate in air conditioned space maintained at 75°F (24°C) and 55% relative humidity. Continuing product improvement may subject specifications to change without notice.

CUSTOMER NAME	
<input type="checkbox"/> APPROVED	<input type="checkbox"/> APPROVED AS NOTED
<input type="checkbox"/> RESUBMIT	
AUTHORIZED SIGNATURE	DATE

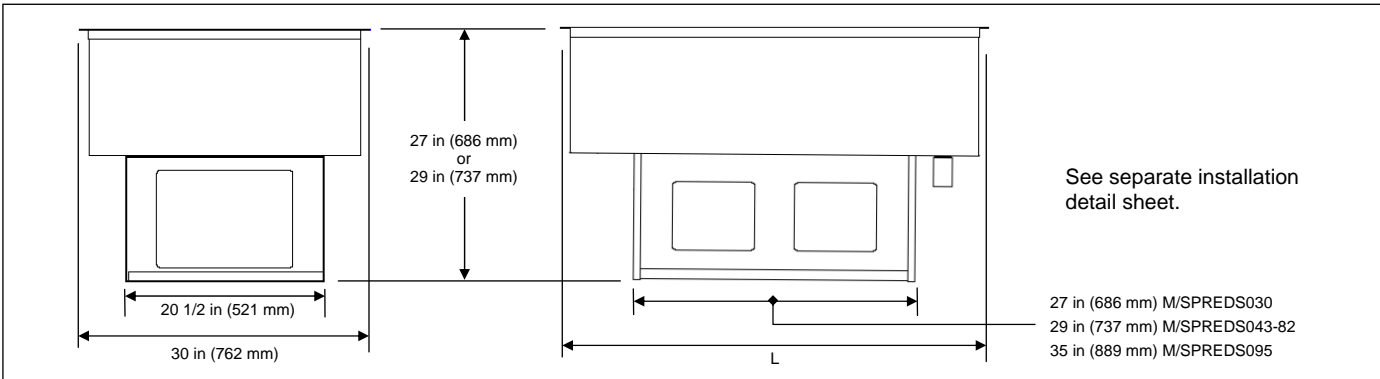


Refcon Inc.
 335 Chestnut Street Norwood, NJ 07648 USA
 Tel: (201) 750-5060
 Fax: (201) 750-5066
 e-mail: sales@refconcase.com
REFCON™ www.refconcase.com

PROJECT	ITEM NO
---------	---------




Cafeteria refrigerated salad bar

MODEL M/SPRED



	Model	Dimensions (drop-in version)		Refrigeration requirements	Pans 12 x 20 x 4	Crated Weight	
		(L x D x H) in	(L x D x H) mm			lb	kg
Self-contained Refrigeration	M/SPREDS030	30 7/8 x 30 x 27	784 x 762 x 686	1/4 HP	2	275	125
	M/SPREDS043	43 7/8 x 30 x 27	1114 x 762 x 686	1/3 HP	3	300	136
	M/SPREDS056	56 7/8 x 30 x 27	1445 x 762 x 686	1/2 HP	4	350	159
	M/SPREDS069	69 3/4 x 30 x 27	1772 x 762 x 686	1/2 HP	5	400	182
	M/SPREDS082	82 9/16 x 30 x 27	2097 x 762 x 686	1/2 HP	6	500	227
	M/SPREDS095	95 1/2 x 30 x 29	2426 x 762 x 737	3/4 HP	7	600	272
Remote Refrigeration (R404a)	M/SPREDR030	30 7/8 x 30 x 27	784 x 762 x 686	1600 @ +15	2	225	102
	M/SPREDR043	43 7/8 x 30 x 27	1114 x 762 x 686	2400 @ +15	3	275	125
	M/SPREDR056	56 7/8 x 30 x 27	1445 x 762 x 686	3000 @ +15	4	325	148
	M/SPREDR069	69 3/4 x 30 x 27	1772 x 762 x 686	3800 @ +15	5	375	170
	M/SPREDR082	82 9/16 x 30 x 27	2097 x 762 x 686	4500 @ +15	6	425	193
	M/SPREDR095	95 1/2 x 30 x 27	2426 x 762 x 686	5200 @ +15	7	475	216

Electrical

	Model	Volts	Phase	Cycle/Hz	Watts	MCA	Plug type
Self-contained Refrigeration	M/SPREDS030	120	1	60	1297	11	NEMA 5-15P 
	M/SPREDS043	120	1	60	1034	9	
	M/SPREDS056	120	1	60	1502	13	
	M/SPREDS069	120	1	60	1502	13	
	M/SPREDS082	120	1	60	1756	15	
	M/SPREDS095	120-208	1	60	1426	10	NEMA L14-20P 
Remote Refrigeration (R404a)	M/SPREDR030	120	1	60	13	1	NEMA 5-15P 
	M/SPREDR043	120	1	60	26	1	
	M/SPREDR056	120	1	60	26	1	
	M/SPREDR069	120	1	60	26	1	
	M/SPREDR082	120	1	60	40	1	
	M/SPREDR095	120	1	60	53	1	

Laboratory certifications



Cutout:
Subtract 1 1/2 in. (38 mm) from length and depth dimensions.

See separate installation detail sheet.

NOTE: Floor drain required.

Please specify exterior finish:



Refcon Inc.

Tel: (201) 750-5060
www.refconcase.com