

PROJECT NAME	JOB NO.	QUANTITY	ITEM NO
--------------	---------	----------	---------

Air screen Milkindizer™ refrigerated case

High girl cooler

MODEL SWINM-HG



Milkindizer™ airtscreen refrigerated case high girl Model SWINM-HG with custom graphic treatment.

General Information

High girl refrigerated cases provide the ideal display solution for self-serve milk and chilled prepackaged items without customer-side doors.

A curtain of refrigerated air directed across the open front efficiently seals off warmer ambient air. This allows better visibility, easy selection and loading, and eliminates maintenance problems with worn-out or ill-fitting doors.

The Milkindizer air-screen high girl is designed especially by Refcon to promote bottles or standard paper cartons of milk in school cafeterias. Standard milk crates drop easily into the lower unit, while individual cartons, bottles or related products are stacked on well-lit shelves above.

Refcon Air Screen cases are attractive, quiet, and built from tough, easy-to-clean stainless steel and laminates. Standard 3500K interior lighting offers a bright, attention-getting display. Electronic temperature and defrost control and digital temperature display makes it easy to keep products cold while using energy efficiently.

Available with self-contained or remote refrigeration. Leveling legs are standard. Choose from 3 lengths for 8, 10, or 12 whole-crate capacity.

Standard Features

- Stainless steel interior.
- (2) adjustable lighted 12 in. (30 cm) shelves and (1) fixed shelf.
- Mirror ends.
- Standard grade plastic laminate exterior (matte finish.)
- 3500K fluorescent tube lights.
- Digital temperature display.
- Electronic temperature and defrost control (self-contained units).
- Structural steel base with leveling legs.
- Refrigeration and electrical connections at top of unit.

Options

- Stainless steel exterior
- Remote refrigeration temperature control package
- Sound reduction package
- Graphics
- Upper face signage
- HTH (High temperature/humidity) package—80°F(27°C)/60% R.H. for adverse environments. Contact factory for specifications changes.
- Roll down security shutter (See SWINM-HG security option sheet for details).
- Power cord and plug

Designed to operate in air conditioned space maintained at 75°F (24°C) and 55% relative humidity. Continuing product improvement may subject specifications to change without notice.

CUSTOMER NAME	
<input type="checkbox"/> APPROVED	<input type="checkbox"/> APPROVED AS NOTED
<input type="checkbox"/> RESUBMIT	
AUTHORIZED SIGNATURE	DATE




Refcon Inc.
 335 Chestnut Street Norwood, NJ 07648 USA
 Tel: (201) 750-5060
 Fax: (201) 750-5066
 e-mail: sales@refconcase.com
 www.refconcase.com

PROJECT	ITEM NO
---------	---------

Air screen Milkindizer™ refrigerated case

High girl cooler

MODEL SWINM-HG

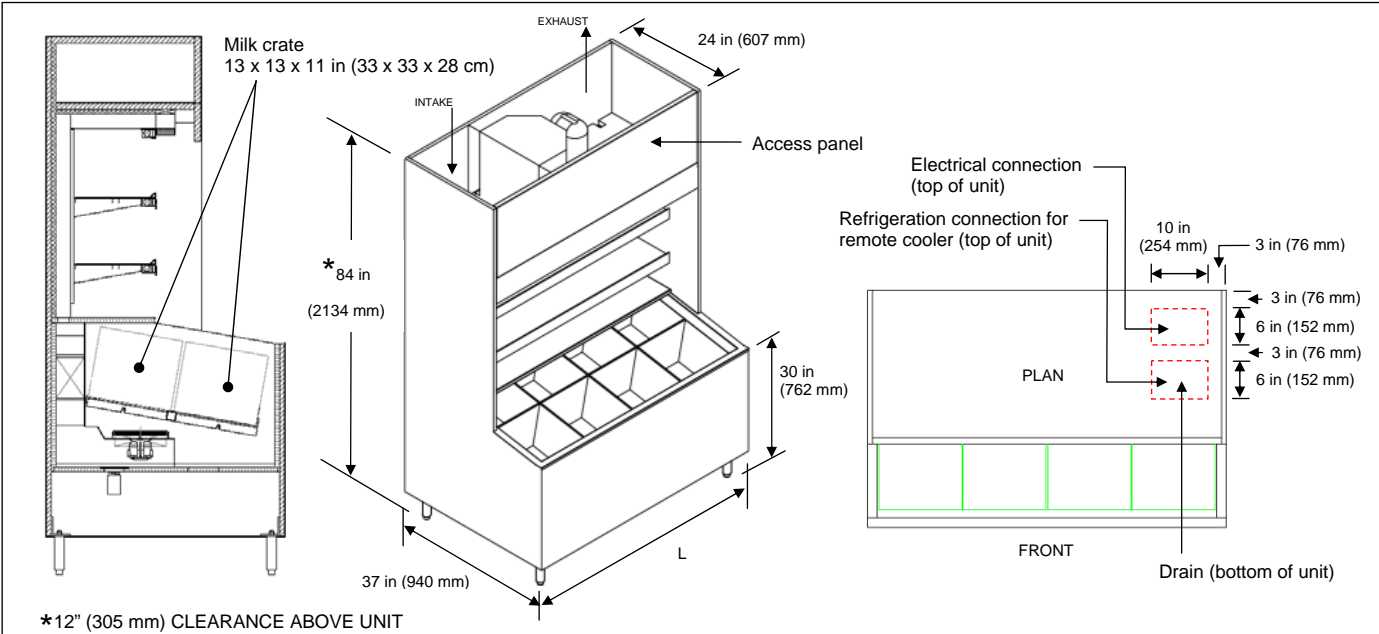

	Model	Dimensions		Whole crates	Required Refrigeration	Crated Weight	
		(L x D x H) in	(L x D x H) mm			lb	kg
Self-contained Refrigeration	SWINMS056-HG	56 x 37 x 84	1422 x 940 x 2134	8	1 HP	850	386
	SWINMS069-HG	69 x 37 x 84	1753 x 940 x 2134	10	1 1/4 HP	950	431
	SWINMS082-HG	82 x 37 x 84	2083 x 940 x 2134	12	1 1/2 HP	1050	477
Remote Refrigeration (R404a)	SWINMR056-HG	56 x 37 x 84	1422 x 940 x 2134	8	7600 @ +15	650	295
	SWINMR069-HG	69 x 37 x 84	1753 x 940 x 2134	10	10200 @ +15	750	341
	SWINMR082-HG	82 x 37 x 84	2083 x 940 x 2134	12	11600 @ +15	850	386



Electrical	Model	Volts	Phase	Cycle/Hz	Watts	MCA	Plug type (optional)
Self-contained Refrigeration	SWINMS056-HG	120-208	1	60	1797	15	NEMA L14-20P
	SWINMS069-HG	120-208	1	60	3012	19	
	SWINMS082-HG	120-208	1	60	3012	19	
Remote Refrigeration (R404a)	SWINMR056-HG	120	1	60	263	3	NEMA 5-15P
	SWINMR069-HG	120	1	60	263	3	
	SWINMR082-HG	120	1	60	263	3	

NOTE: Floor drain required.

Please specify exterior finish:



Refcon Inc.
Tel: (201) 750-5060
www.refconcase.com